


# DiViINA LM2

## Line Scan Camera

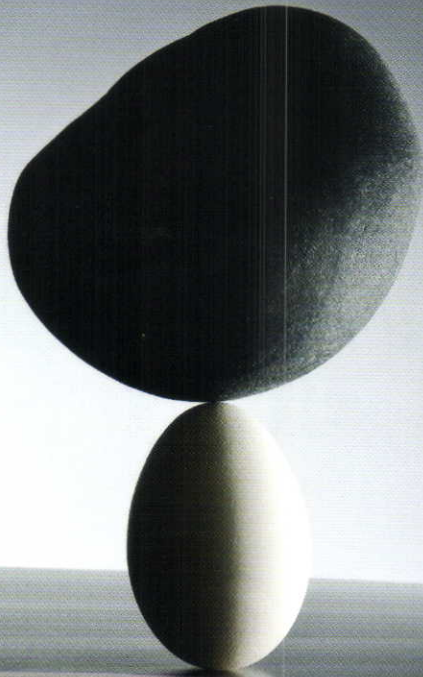

## Perfectly balanced

### Low price, high value

#### Key Features

- ❖ Sensor range: 1024 to 4096 Pixels, 10  $\mu$ m or 14  $\mu$ m
- ❖ Interface: Camera Link, (Base configuration)
- ❖ Mechanics: 60x60x45 mm (w, h, l)
- ❖ Data rate: up to 40 M pixels/s
- ❖ Output format: 2 taps 20 MHz
- ❖ Bit depth: 8 bits
- ❖ Cost effective and easy to use
- ❖ Fully configurable by the user with CommCam software

#### Typical Applications

- ❖ Web inspection  
i.e. wood, paper, metalurgy
- ❖ Parts inspection or sorting  
i.e. cotton, rice, food
- ❖ General machine vision inspection



# DiViINA LM2 Line Scan Camera

e2v

DiViINA is a cost efficient CCD line scan camera family with Camera Link interface. Featuring e2v's own high performance linear CCD sensors from 1024 pixels up to 4096 pixels, as used in the world leading AViVA cameras, DiViINA cameras offer high image quality with user-friendly simplicity. DiViINA is the perfect candidate for mid range machine vision applications.

## Detailed Specifications

### Sensor Characteristics

Resolution	pixels	1024	2048	4096
Pixel Size (square)	µm	10 or 14	10 or 14	10
Maximum Line Rate	kHz	35,7	18,1	9,5

### Functionalities (Programmable by Control Interface)

Gain	0 to 35 dB (0.035 dB steps)
Offset	0 to 63 LSB
Exposure Time	Up to 65 ms
Trigger Mode	Free Run, External Trigger
Regulatory	RoHS, CE compliant

### Radiometric Performances

Bit Depth	bits	8
Spectral Range	nm	250 - 1100
Non-linearity	%	< 1
Dynamic Range	dB	58

### Mechanical and Electrical Interface

Size (w x h x l)	mm	60 x 60 x 45
Lens Mount		M42 x 1
Optional Lens Adaptor		C, F
Sensor Alignment	µm	Better than ± 200
Power Supply	V	Single 12 to 24
Power Dissipation	W	< 5
Operating Temperature	°C	0 to 65 (front face)
Storage Temperature	°C	-40 to 70

### Connectors

Power	HR10 6-pin
Control & Data: Camera Link	MDR 26-pin

DiViINA



CAMERA  
Link  
REGISTERED PRODUCT

ComCam

CE



## Overview of e2v's Line Scan Camera offer

Commercial Name	M/C	Max Data Rate M Pixels/s	Interface	Resolution	Bit Depth
AViVA SM2	Monochrome	60	CL/LVDS	512 to 4096	up to 12 bits
AViVA SC2	Colour	60	CL/LVDS	4096	up to 12 bits
AViVA UM2	Monochrome	62	GigE	512 to 4096	up to 12 bits
AViVA UC2	Colour	62	GigE	4096	up to 12 bits
AViVA UM4	Monochrome	160	CL	8192	up to 12 bits
AViVA UM8	Monochrome	320	CL	12 288	up to 12 bits
ELiIXA UC4/UC8	Colour	320	CL	4 x 4096	up to 12 bits
ELiIXA 3V	Monochrome	320	CL	3 x 4096	up to 12 bits
ELiIXA 4S	Monochrome	80	CL	4 x 4096	up to 12 bits
DiViINA LM2	Monochrome	40	CL	1024 to 4096	8 bits

www.e2v.com © copyright e2v technologies 2009

### Sales offices

#### European regional sales offices

##### e2v ltd

106 Waterhouse Lane  
Chelmsford - Essex CM1 2QU  
England  
T +44 (0)1245 493 493  
F +44 (0)1245 492 492  
enquiries@e2v.com

##### e2v sas

16 Burospace  
91572 Bièvres Cedex  
France  
T +33 (0)1 60 19 55 00  
F +33 (0)1 60 19 55 29  
enquiries-fr@e2v.com

##### e2v gmbh

Industriestraße 29  
82194 Gröbenzell  
Germany  
T +49 (0)8142 410 570  
F +49 (0)8142 284 547  
enquiries-de@e2v.com

#### Americas

##### e2v inc

520 White Plains Road  
Suite 450  
Tarrytown-NY 10591  
USA  
T +1 (914) 592 6050  
F +1 (914) 592 5148  
enquiries-na@e2v.com

#### Asia Pacific

##### e2v ltd

11/F. Onfern Tower  
29 Wyndham Street, Central  
Hong Kong  
T +852 3679 364 8/9  
F +852 3583 1084  
enquiries-ap@e2v.com

### Product Contact

##### e2v

Avenue de Rochepleine - BP 123  
38521 Saint-Egrève Cedex  
France  
T +33 (0)4 76 58 30 00  
F +33 (0)4 76 58 34 80  
hotline-cam@e2v.com

